

CT4 balance control

SPECIFICATIONS


Number of steps:	23
Channel balance adjustment range:	+/-3 dB
Channel balance adjustment resolution:	+/-0.25 dB (+/-0.5dB)
THD:	0.0001 %
Attenuation accuracy:	+/-0.05 dB
Channel matching:	+/-0.05 dB
Mechanical life, min.:	>25,000 cycles
Contacts and wiper:	Hard-gold plated

High-end sound

Precision balance control with 1/4dB balance adjustment

Non-inductive SMD resistor network

All contacts and connectors gold plated

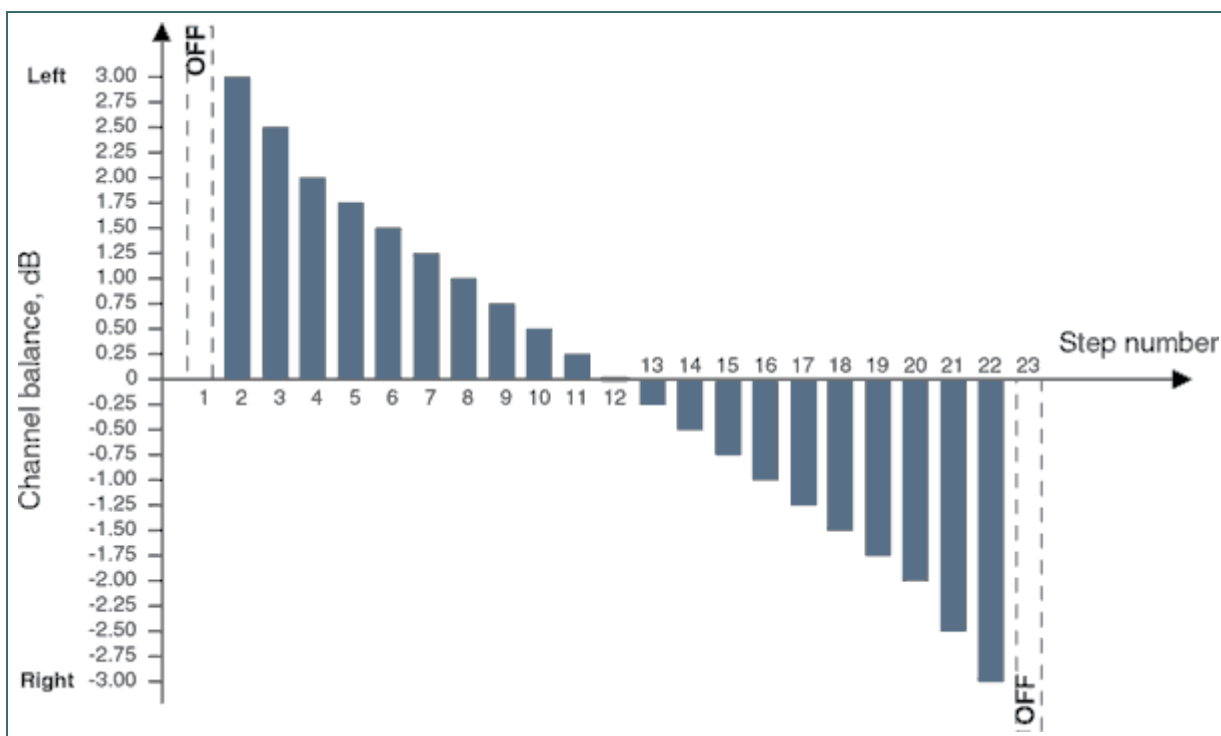

CT4 schematic

